

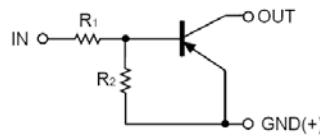


## Digital Transistors (built-in resistors)

### DTA124EUA

#### ■ Features

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors.
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- Only the on/off conditions need to be set for operation, making device design easy.

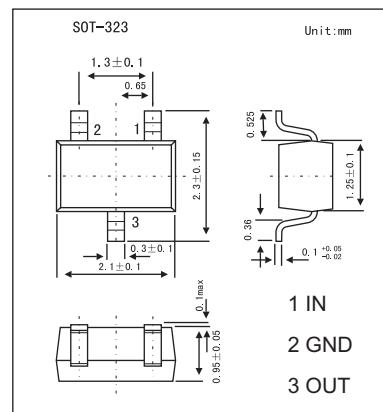

#### ■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Supply voltage	Vcc	-50	V
Input voltage	V <sub>IN</sub>	-40 to 10	V
Output current	I <sub>O</sub>	-30	mA
	I <sub>C</sub>	-100	
Power dissipation	P <sub>D</sub>	200	mW
Junction temperature	T <sub>j</sub>	150	°C
Storage temperature	T <sub>stg</sub>	-55 to +150	°C

#### ■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Input voltage	V <sub>I(off)</sub>	V <sub>cc</sub> =-5V, I <sub>O</sub> =-100µA			-0.5	V
	V <sub>I(on)</sub>	V <sub>O</sub> =-0.2V, I <sub>O</sub> =-5mA	-3			
Output voltage	V <sub>O(on)</sub>	I <sub>O</sub> /I <sub>I</sub> =-10mA/-0.5mA		-0.1	-0.3	V
Input current	I <sub>I</sub>	V <sub>I</sub> =-5V			-0.36	mA
Output current	I <sub>O(off)</sub>	V <sub>cc</sub> =-50V, V <sub>I</sub> =0V			-0.5	µA
DC current gain	G <sub>I</sub>	V <sub>O</sub> =-5V, I <sub>O</sub> =-5mA	56			
Input resistance	R <sub>I</sub>		15.4	22	28.6	KΩ
Resistance ratio	R <sub>2</sub> /R <sub>1</sub>		0.8	1	1.2	
Transition frequency *	f <sub>T</sub>	V <sub>ce</sub> =-10V, I <sub>E</sub> =5mA, f=100MHz		250		MHz

\* Transition frequency of the device.

#### ■ Marking

Marking	15
---------	----

## DTA124EUA

### ■ Typical Characteristics

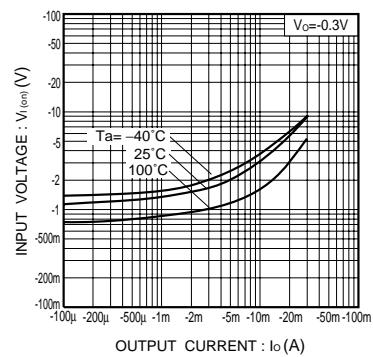


Fig.1 Input voltage vs. output current  
(ON characteristics)

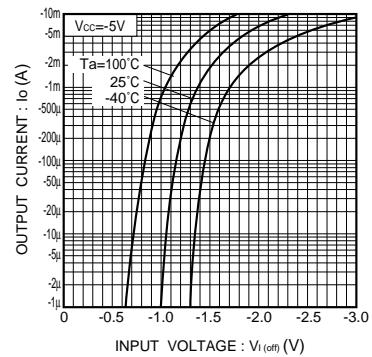


Fig.2 Output current vs. input voltage  
(OFF characteristics)

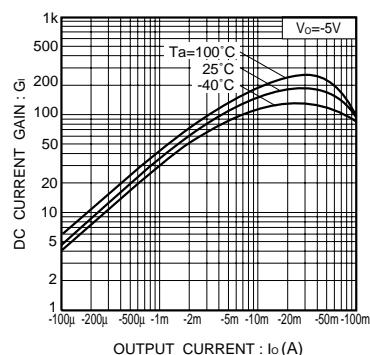


Fig.3 DC current gain vs. output current

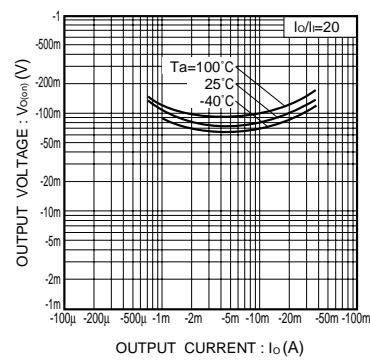


Fig.4 Output voltage vs. output current