


PIN Diode for VHF,UHF,AGC USE Applications

1SV234

■ Features

- Series connection of 2 elements in an ultrasmall package facilitates high-density mounting and permits 1SV234-applied equipment to be made smaller.
- Small interterminal capacitance ($C=0.23\text{pF}$ typ).
- Small forward series resistance ($r_s=5\Omega$ typ).

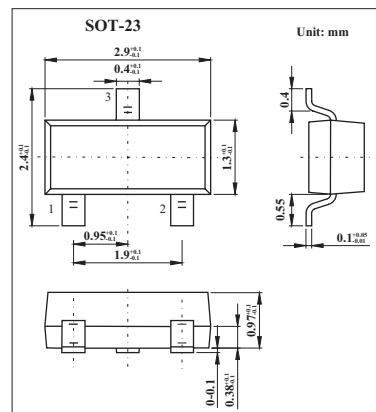

■ Absolute Maximum Ratings Ta = 25°C

| Parameter | Symbol | Value | Unit |
|-----------------------------|------------------|-------------|------|
| Reverse Voltage | V _R | 50 | V |
| Forward Current | I _F | 50 | mA |
| Allowable Power Dissipation | P | 150 | mW |
| Junction Temperature | T _j | 125 | °C |
| Storage temperature | T _{stg} | -55 to +125 | °C |

■ Electrical Characteristics Ta = 25°C

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|---------------------------|----------------|-------------------------------------|-----|------|-----|------|
| Reverse Voltage | V _R | I _R = 10 μ A | 50 | | | V |
| Reverse Current | I _R | V _R = 50 V | | | 0.1 | μ A |
| Forward Voltage | V _F | I _F = 50 mA | | 0.95 | | V |
| Interterminal Capacitance | C | V _R = 50 V, f = 1 MHz | | 0.23 | | pF |
| Series Resistance | r _s | I _F = 10 mA, f = 100 MHz | | 5 | | Ω |

Note: The specifications shown above are for each individual diode

■ Marking

| | |
|---------|----|
| Marking | CV |
|---------|----|