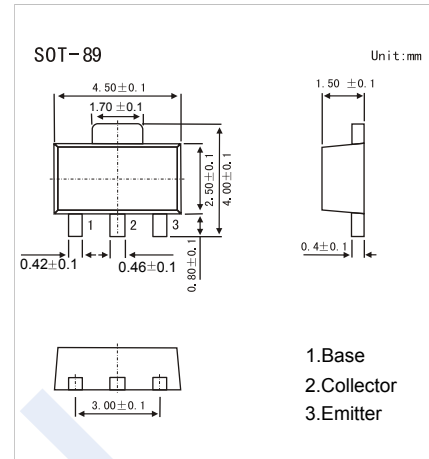


NPN Transistors

2SC2884

■ Features

- Suitable for output stage of 1 watts amplifier
- Small flat package
- $P_c = 1.0$ to 2.0 W (mounted on a ceramic substrate)
- Complementary to 2SA1204

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V_{CB0}	35	V
Collector - Emitter Voltage	V_{CE0}	30	
Emitter - Base Voltage	V_{EB0}	5	
Collector Current - Continuous	I_c	800	mA
Base Current	I_B	160	
Collector Power Dissipation (Note.1)	P_c	500 1000	mW
Junction Temperature	T_J	150	
Storage Temperature Range	T_{stg}	-55 to 150	

Note.1: Mounted on a ceramic substrate ($250\text{ mm}^2 \times 0.8\text{ t}$)

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V_{CB0}	$I_c = 1\text{ mA}$, $I_E = 0$	35			V
Collector- emitter breakdown voltage	V_{CE0}	$I_c = 10\text{ mA}$, $I_B = 0$	30			
Emitter - base breakdown voltage	V_{EB0}	$I_E = 1\text{ mA}$, $I_c = 0$	5			
Collector-base cut-off current	I_{CBO}	$V_{CB} = 35\text{ V}$, $I_E = 0$			0.1	uA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5\text{ V}$, $I_c = 0$			0.1	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_c = 500\text{ mA}$, $I_B = 20\text{ mA}$			0.5	V
Base - emitter saturation voltage	$V_{BE(sat)}$	$I_c = 500\text{ mA}$, $I_B = 20\text{ mA}$			1.2	
Base - emitter voltage	V_{BE}	$V_{CE} = 1\text{ V}$, $I_c = 10\text{ mA}$	0.5		0.8	
DC current gain	h_{FE}	$V_{CE} = 1\text{ V}$, $I_c = 100\text{ mA}$	100		320	
		$V_{CE} = 1\text{ V}$, $I_c = 700\text{ mA}$	35			
Collector output capacitance	C_{ob}	$V_{CB} = 10\text{ V}$, $I_E = 0$, $f = 1\text{ MHz}$		13		pF
Transition frequency	f_t	$V_{CE} = 5\text{ V}$, $I_c = 10\text{ mA}$		120		MHz

■ Classification of $h_{fe}(1)$

Marking	PO*	PY*
Range	100-200	160-320

NPN Transistors

2SC2884

Typical Characteristics

