
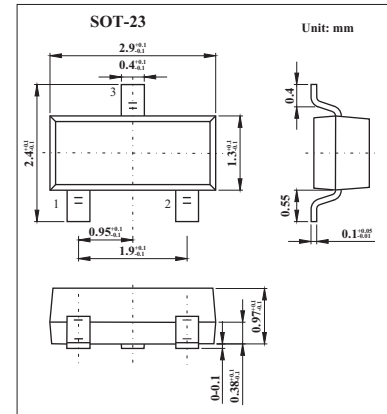


Surface Mount PIN Diodes

HSMP-3820

■ Features

- Low Current Switching
- Low Distortion Attenuating
- Ultra-Low Distortion Switching



■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Continuous reverse voltage	V_R	50	V
Forward current (1 ms Pulse)	I_F	1	A
Power Dissipation @ $T_A = 25^\circ\text{C}$	P_{tot}	250	mW
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-65 to +150	$^\circ\text{C}$

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Test conditons	Min	Typ	Max	Unit
Reverse voltage	V_R	$I_R = 10 \mu\text{A}$	50			V
Series Resistance	R_S	$I_F = 10\text{mA}, f = 100\text{MHz}$			0.6	Ω
Total Capacitance	C_T	$V_R = 20\text{V}, f = 1\text{MHz}$			0.8	pF

■ Marking

Marking	F0

HSMP-3820

■ Typical Characteristics

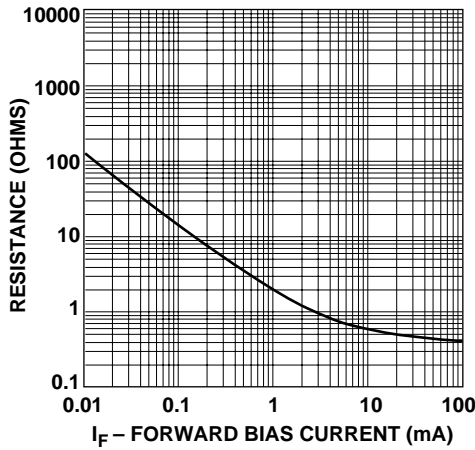


Figure 1. Resistance at 25°C vs. Forward Bias Current.

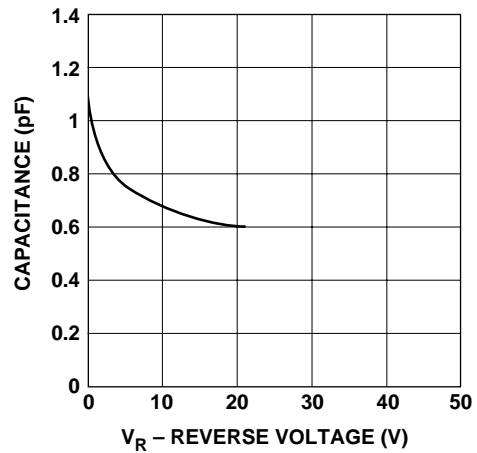


Figure 2. Capacitance vs Reverse Voltage.

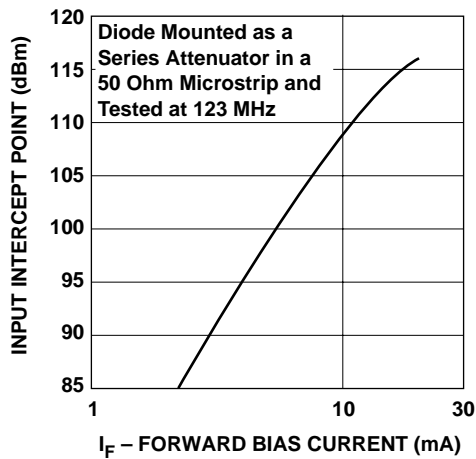


Figure 3. 2nd Harmonic Input Intercept Point vs. Forward Bias Current for Switch Diodes.

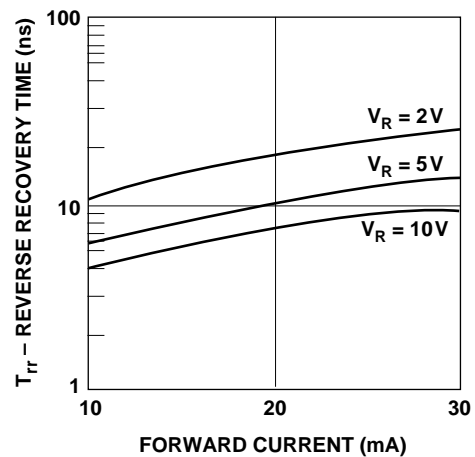


Figure 4. Reverse Recovery Time vs. Forward Current for Various Reverse Voltages.

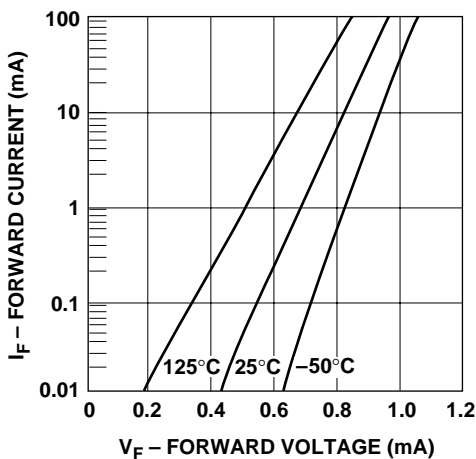


Figure 15. Forward Current vs Forward Voltage.