
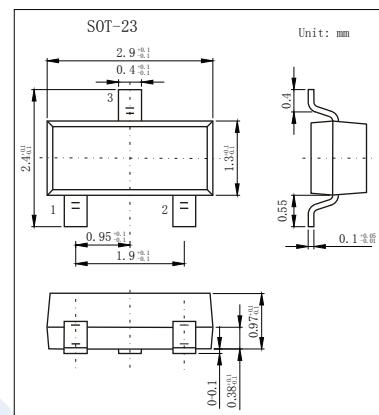


Switching Diodes

1SS181

■ Features

- Low forward voltage. : $V_F(3)=0.92V$ (Typ.)
- Fast reverse recovery time : $t_{rr}=1.6ns$ (Typ.)
- Small total capacitance : $C_T=2.2pF$ (Typ.)



■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Peak reverse voltage	V_{RM}	85	V
Reverse voltage	V_R	80	V
Average forward current	I_o	100	mA
Peak forward current	I_{FM}	300	mA
Surge current (10ms)	I_{FSM}	2	A
Power dissipation	P	150	mW
Junction temperature	T_j	125	$^\circ C$
Storage temperature	T_{stg}	-55 to +125	$^\circ C$

■ Electrical Characteristics $T_a = 25^\circ C$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse breakdown voltage	V_R	$I_R= 100 \mu A$	80			V
Forward voltage	V_{F1}	$I_F= 1 mA$		0.61		
	V_{F2}	$I_F= 10mA$		0.74		
	V_{F3}	$I_F= 100 mA$		0.92	1.2	
Reverse voltage leakage current	I_{R1}	$V_R=30 V$			0.1	μA
	I_{R2}	$V_R=80 V$			0.5	
Capacitance between terminals	C_T	$V_R= 0 V, f= 1 MHz$	2.2	4		pF
Reverse recovery time	t_{rr}	$I_F=10mA$		1.6	4	ns

■ Marking

Marking	A3
---------	----

1SS181

■ Typical Characteristics

